

LABEL APPLICATOR R-3500


ITW β ETAPRINT

- TOTALLY ELECTRONIC AND DIGITALLY CONTROLLED**
- SUPERIOR ENGINEERING WITH LARGE LABEL ROLL CAPACITY**
- LARGE VARIETY OF OPTIONS AND ACCESSORIES**



The R-3500 is a pressure sensitive label applicator using the latest generation technology.

The system is easy to integrate on conveyors. Many options and accessories are available.

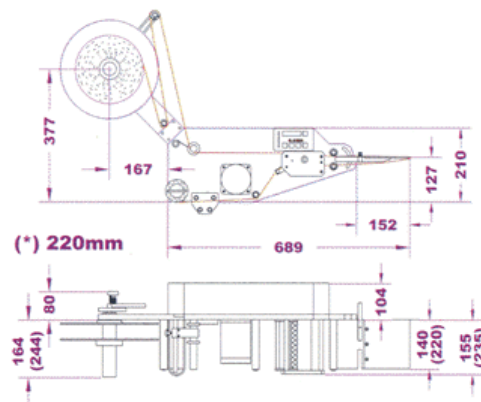

Technical specifications :

Application speed..	25... 50 m/min. (1)
Width of labels..	120 - 200 mm (*) (1)
Maximum length of labels..	350 mm (*)
Reel diameter..	280 mm (*)
Core diameter..	40 and 75 mm (*)
Interconnection..	2 input / 6 output

(*) (Other sizes are available upon request)

Model specification: R - 3500 - L E M 0 (1)


L = 1	Left / Right	M = 1	Speed up to 25 m/min.
L = 2	Right / Left	M = 2	Speed up to 50 m/min.
		M = 3	Variable speed with encoder
E = 1	Width 120 mm	M = 4	M - 1 + Pneumatic applicator
E = 2	Width 200 mm	M = 5	M - 2 + Pneumatic applicator

Accessories:


A/B: Pneumatic applicator
C: Beacon of 1 to 3 colors
D: Encoder w/bracket (w/opt. M - 3)
E/F: Brush applicator
G: Low label supply detector

H: Broken label web detector
K: Bracket for Printer JAGUAR II-52/TP-5100
L: Bracket for the Thermal printer
N: Bracket for the printing unit 110 mm TF-1100
P: Bracket devices


(Other accessories are available upon request.)

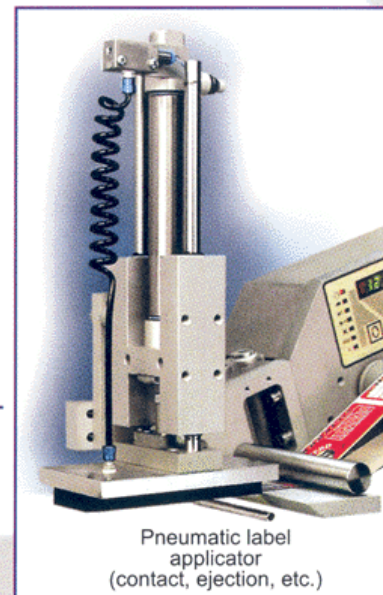

Pneumatic label applicator (contact, ejection, etc.)

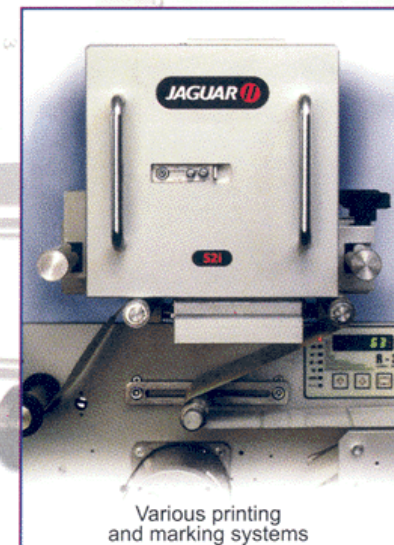


Various printing and marking systems

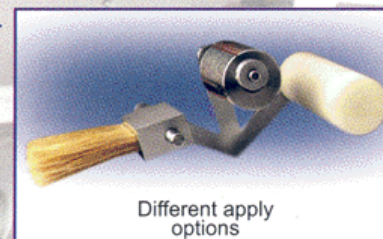

Different apply options



Connections

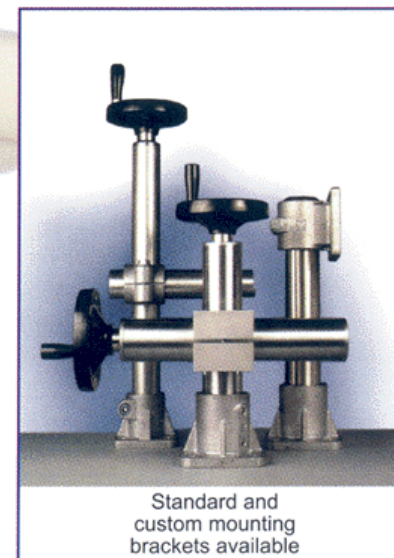

Standard and custom mounting brackets available

ITW BETAPRINT
DIVISION DE ITW ESPAÑA, S.A.
SISTEMAS DE IMPRESIÓN Y ETIQUETADO

DISTRIBUTOR:

C. Pedro Ponce de León, 4
Pol. Ind. N.º 1 - 08960 Sant Just Desvern
Tf. +34 93 470 56 00 - Fax +34 93 473 56 21
e-mail: info@betaprint.com
web: www.betaprint.com